


LMS SERIES

STANDARD MINI STRIP

- Ideal for flush or row mounting
- Pre-finished 21 ga steel in a baked white enamel
- UL listed for dry locations
- Starters included

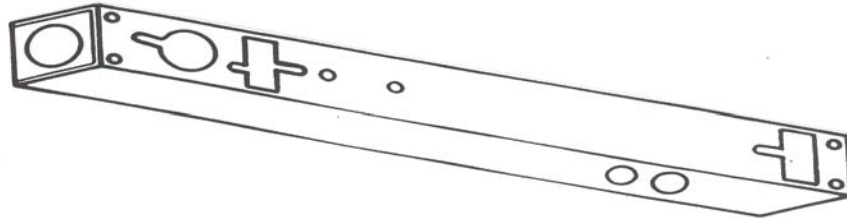

Dimensions subject to change, inquire at factory for latest data



ENERGY SAVING FLUORESCENT FIXTURES T5 PRE-HEAT WITH STARTERS						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
LMS4	1LT	F4T5	PRE-HEAT	9-1/16IN	1-3/8IN	1-3/8IN
LMS6	1LT	F6T5	PRE-HEAT	12-1/16IN	1-3/8IN	1-3/8IN
LMS8	1LT	F8T5	PRE-HEAT	15-1/16IN	1-3/8IN	1-3/8IN
ENERGY SAVING FLUORESCENT FIXTURES T8 PRE-HEAT WITH STARTERS						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
LMS115	1LT	F15T8	PREHEAT	21-1/16IN	1-3/8IN	1-3/8IN
LMS215	2LT TANDEM	F15T8	PREHEAT	40-3/4IN	1-3/8IN	1-3/8IN
LMS315	3LT TANDEM	F15T8	PREHEAT	61-1/4IN	1-3/8IN	1-3/8IN

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- Cord & plug (2 or 3 wire)
- Pull chain switch

